

## Fiber Optic Video & Data Transmission for PTZ Cameras 2-Channel Video + 1 Duplex Data over Fiber

2 →

Video

### System Design

Fiber Optic Video & Data Transmitter & Receiver  
ZW-2010FDT/R can transmission 2-Channel digital composite video and 1 duplex data, the data support RS485, RS232, RS422 protocols. It is also designed for applications that require control of PTZ cameras.

Audio

Stand-alone or rack-mount. All units of ZW-2010FDT/R come in an insert card version. The cards can be inserted into our 14-slot, 19inch 4U or 6U rack-mountable card cage (ZW-CH04 or ZW-CH06).

← 1 →

Data

Single-Mode or Multi-Mode, ZW-2010FDT/R can support FC/PC or ST/PC Optical connector, can be used in Daisy-Chain system (Need to customize). The Transmission distance range according to the Optical Budget. Manufacturer's standard is: Single-mode 20km or Multi-mode 2km.


Ethernet



### Features

- Support Point-to-Point or Daisy-Chain connection
- Uncompressed Digital Composite Video over one fiber
- Compatible with all PAL, NTSC, SECAM Video Systems
- Data support RS485(2-wire or 4-wire), RS232, RS422, Contact Closure
- Multi-mode Fiber Support for Distances up to 2.0 km
- Single-Mode Fiber Support for Distances up to 100 km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- Stand alone or rack-mount

### Typical Configuration

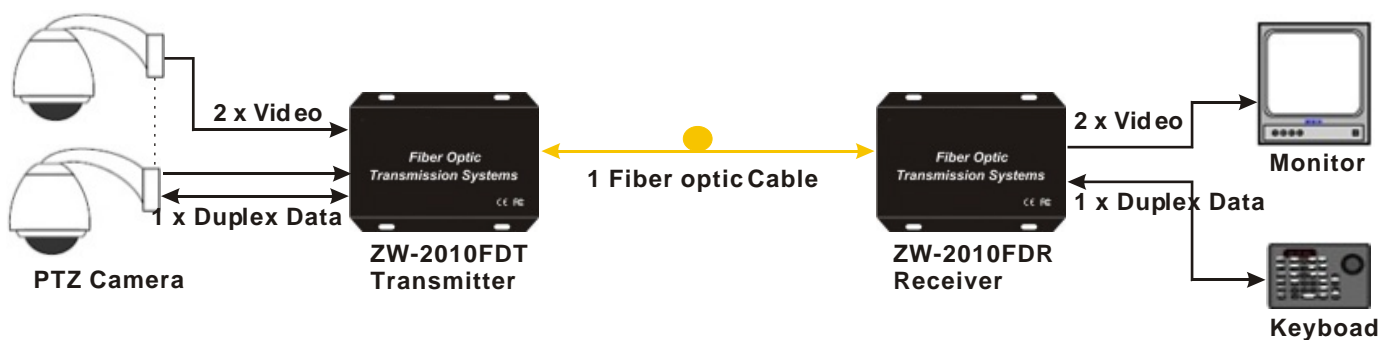

# Video & Data over Fiber

## Ordering Information

Model Number		Fiber Mode	Wavelengths	Optical Power Budget	Maximum Transmission Distance
Transmitter	Receiver				
ZW-2010FDMT	ZW-2010FDMR	Multi-Mode	1310nm/1550nm	16dB	2km
ZW-2010FDST	ZW-2010FDSR	Single-Mode	1310nm/1550nm	12dB	20km
ZW-2010FDST-4	ZW-2010FDSR-4	Single-Mode	1310nm/1550nm	18dB	40km
ZW-2010FDST-6	ZW-2010FDSR-6	Single-Mode	1310nm/1550nm	25dB	60km

### Note:

- The Optical Power Budget data fit Multi-mode(62.5/125  $\mu$ m), Single-Mode(9/125  $\mu$ m).
- When using 50/125  $\mu$ m multimode fiber, subtract 3 dB from the optical power budget.
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables. Power adapter included (for standalone) US, European, UK or Australian power plug.
- Please feel free to consult factory for any special requirement and customization

## Specification

<ul style="list-style-type: none"> <li>• Video</li> </ul>	<ul style="list-style-type: none"> <li>• Connectors</li> </ul>
Number of Channels: 2-Channel Video Input/output impedance: BNC 75 $\Omega$ Input/output Compatibility: PAL, NTSC, SECAM Input/output voltage: 1.0 Volt p-p Bandwidth: 6.5MHZ Bit Resolution: 8-Bit Digital Transmission Differential Gain: < 1.5% Differential Phase: < 1.5° Tilt: < 5% Signal-to-Noise Ratio(SNR): > 67 dB	Video: 75 $\Omega$ BNC (Gold Center Pin) Data: Terminal Block Optical: FC/PC or ST/PC Optional Stand-Alone Power: Screw terminal block Rack Power: AC line cord
<ul style="list-style-type: none"> <li>• Data</li> </ul>	<ul style="list-style-type: none"> <li>• Electrical &amp; Mechanical</li> </ul>
Data Formats: RS485(2-wire or 4-wire), RS232/422, Contact Closure Data Rate: DC to 115.2Kbps Bit Error Rate: 10E-9	Input Power Requirements: DC 5V@2A Power Adapter: AC 100V~240V Power Consumption: < 3W Stand-Alone Dimensions: 142mm $\times$ 107mm $\times$ 25mm Card for 4U Rack Dimensions: 145mm $\times$ 170mm $\times$ 20mm Shipping Weight: 1.8kg (include TX & RX)
	<ul style="list-style-type: none"> <li>• Environmental</li> </ul>
	Operating Temperature: -45° C ~ +75° C Storage Temperature: -45° C ~ +85° C Relative Humidity: 0% ~ 95% (non-condensing) MTBF: > 100,000 hours